



QTD5525

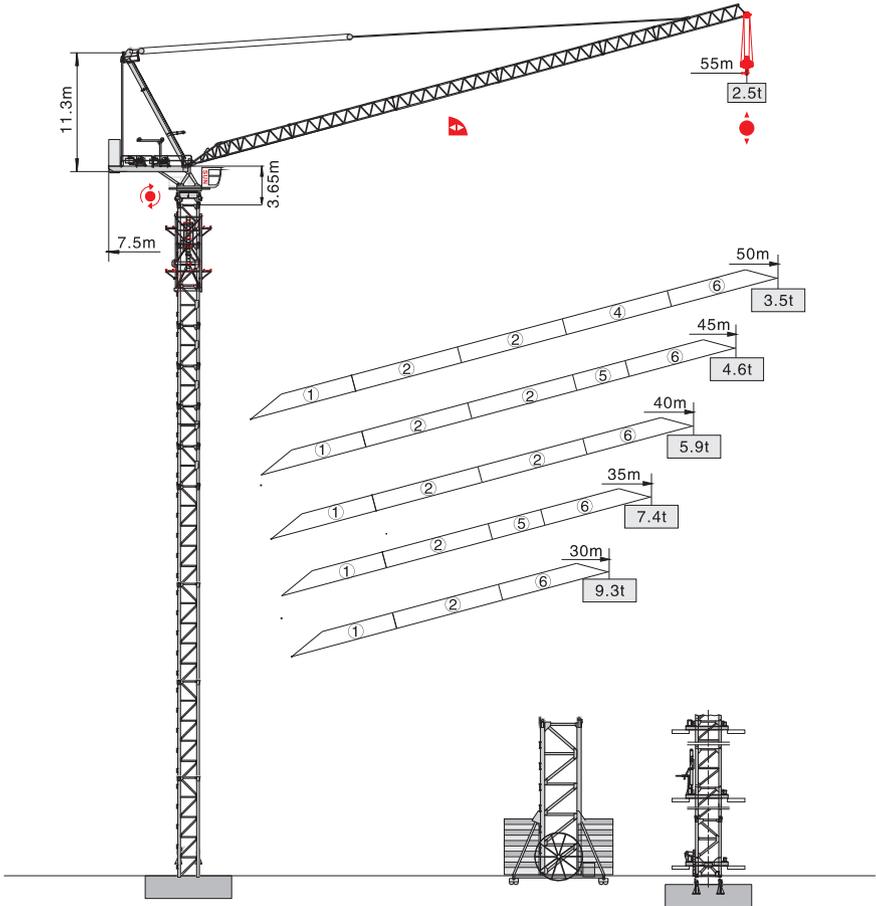


塔身截面 Mast 2m x 2m

固定式 Stationary

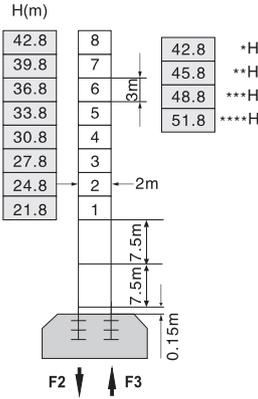


F2	●123t	■228t
F3	●169t	■270t
	⚖️	59t

行走式 Traveling

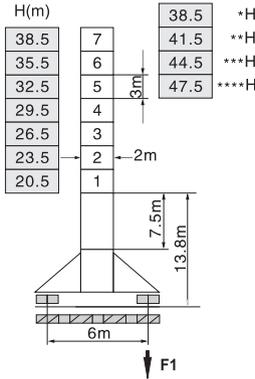

F1	●102t	■168t
	⚖️	68t

内爬式 Inner climbing

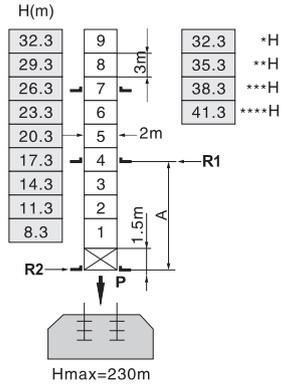


A	12m	18m
R1	46.7t	35.9t
R2	43.3t	32.3t
P	91t	91t
	⚖️	63t

H 臂根铰点下高度 Height under jib hinge shaft 臂架 Jib *55m **50m ***45-40m ****35-30m

- 工作状态 In service F=固定反力或轮压 Reactions
- 非工作状态 Out of service ⚖️ 自重 Total weight without load and counter weight

附着 Anchorage

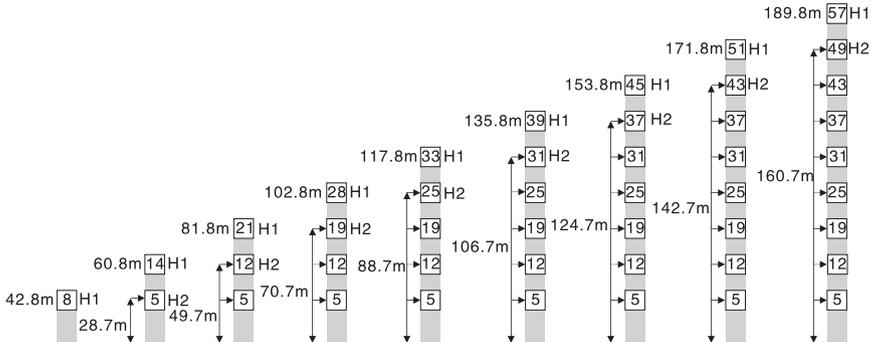


H1—臂根铰点下高度 Height under jib hinge shaft
H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground

① > 189.8m 请向我司咨询 Consult us

载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	5.1-23.9	25	30	35	40	45	50	55
55	IV	起重重量 Load (t)	12	11.24	8.51	6.56	5.09	3.96	3.05	2.3
	III		9		8.61	6.66	5.19	4.06	3.15	2.4
	II		6						5.29	4.16
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.6-24.1	25	30	35	40	45	50	
50	IV	起重重量 Load (t)	12	11.4	8.7	6.77	5.32	4.2	3.3	
	III		9		8.8	6.87	5.42	4.3	3.4	
	II		6						5.52	4.4
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.2-24.3	25	30	35	40	45		
45	IV	起重重量 Load (t)	12	11.52	8.85	6.94	5.51	4.4		
	III		9		8.95	7.04	5.61	4.5		
	II		6						5.71	4.6
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3.7-24.4	25	30	35	40			
40	IV	起重重量 Load (t)	12	11.6	8.98	7.11	5.7			
	III		9		9.21	7.21	5.8			
	II		6						5.9	
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3.3-24.6	25	30	35				
35	IV	起重重量 Load (t)	12	11.75	9.15	7.3				
	III		9		9.4	7.4				
	II		6							
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	2.8-24.8	25	30					
30	IV	起重重量 Load (t)	12	11.85	9.3					
	III		9							
	II		6							

载荷特性 Load Diagrams

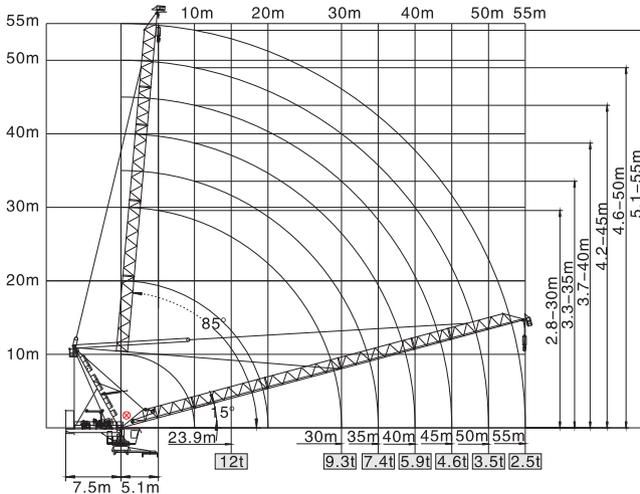

⊗ 臂根铰点 Jib hinge shaft

配重配置表 Counter Weight

		5000kg	5000kg	1000kg	 kg
55m	7.5m	1	3	3	23000
50m	7.5m	1	3	1	21000
45m	7.5m	1	3	1	21000
40m	7.5m	1	3	0	20000
35m	7.5m	1	3	0	20000
30m	7.5m	1	3	0	20000

机构特性 Mechanisms

机构名称 Name	机构型号 Model						功率 Power
		m/min	t	m/min	t		
起升 Hoisting 	75LVF30	0-45	6	0-22.5	12	650m 变频控制 Inverter Control	55Kw
		0-90	3	0-45	6		
拉臂 Luffing 	50DVF40	min	≤3.0		变频控制 Inverter Control	37Kw	
回转 Slewing 	RCV120	r/min	0-0.7			2 × 120Nm	
	RVF120	r/min	0-0.7		变频控制 Inverter Control	2 × 5.5Kw	
行走 Traveling 	RT443	m/min	0-24		变频控制 Inverter Control	4 × 4Kw	
电网/Power Supply				380V/50Hz 440V/60Hz (± 5%)			
供电容量/Necessary Power				128KVA/148KVA (traveling)			

※本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.