



# QTD6040

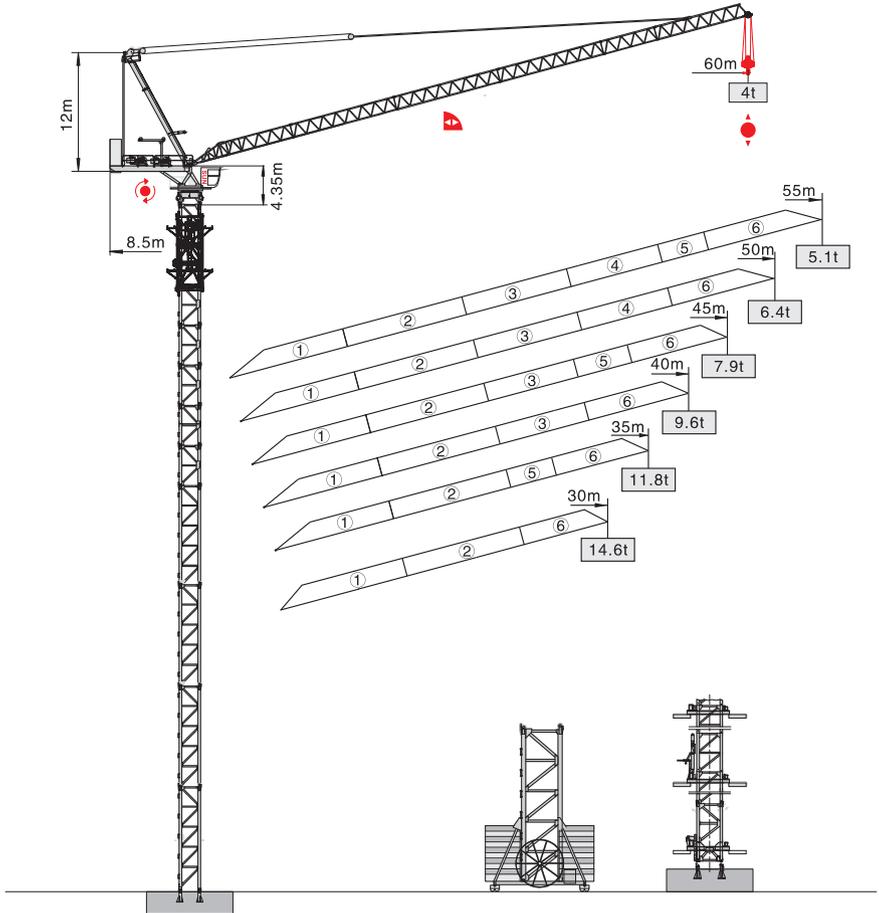


## 塔身截面 Mast 2.2m × 2.2m 2m × 2m

固定式 Stationary

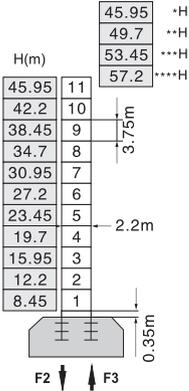


F2	● 180t	■ 315t
F3	● 131t	■ 272t
	83t	

固定式 Stationary

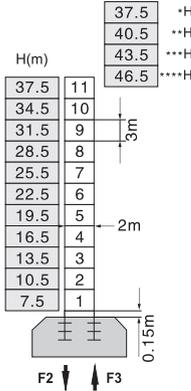


F2	● 172t	■ 308t
F3	● 123t	■ 265t
	75t	

行走式 Traveling

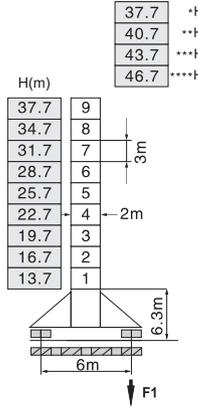

F1	● 120t	■ 152t
	85t	


内爬式 Inner climbing

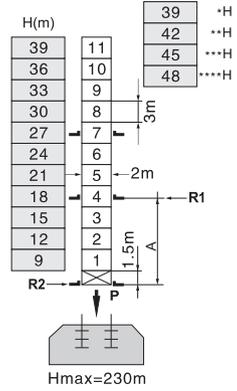

A	12m	18m
R1	30t	22.5t
R2	26t	19.5t
P	97t	97t
	85t	


- H 臂根铰点下高度 Height under jib hinge shaft 臂架 Jib \*60m \*\*55-50m \*\*\*45-40m \*\*\*\*35-30m
- 工作状态 In service F=固定反力或轮压 Reactions
- 非工作状态 Out of service 自重 Total weight without load and counter weight

## 附着 Anchorage 2.2m × 2.2m

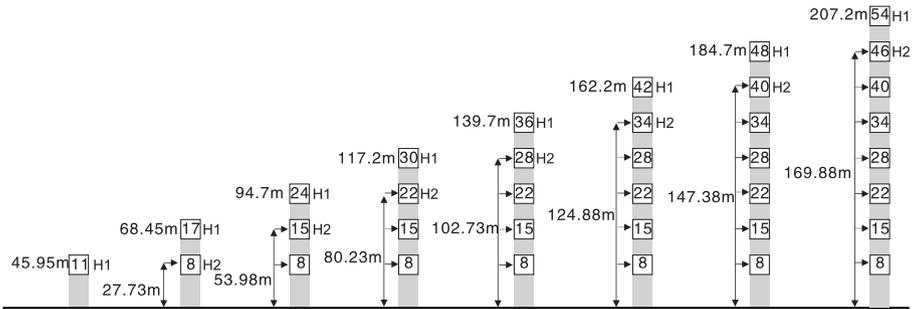

- H1—臂根铰点下高度 Height under jib hinge shaft
- H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground
- ① >207.2m 请向我司咨询 Consult us

## 塔身截面 Mast 2m x 2m

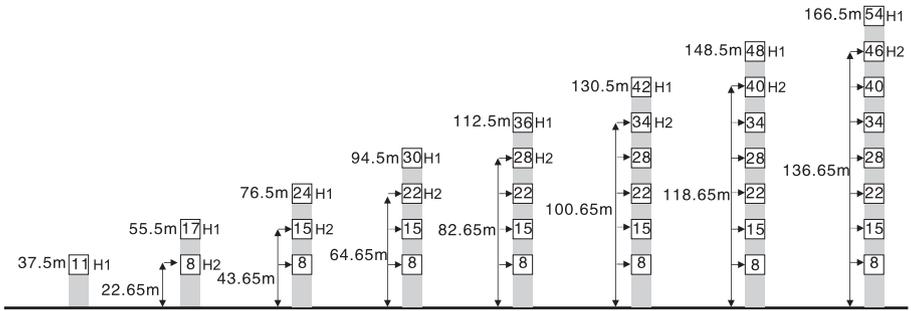

H1—塔机吊钩距地面的高度 Height under hook

H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground

① > 166.5m 请向我司咨询 Consult us

## 载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	5.5-42.35		45	50	55	60
60	II	起重重量 Load (t)	8		7.36	6.01	4.92	4
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	5.1-33.16		35	40	45	50
55	III	起重重量 Load (t)	12		11.06	8.94	7.3	5.98
	II		8			7.5	6.18	5.1
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.6-26.95	30	35	40	45	50
50	IV	起重重量 Load (t)	16	13.79	11.01	8.92	7.3	6
	III		12		11.21	9.12	7.5	6.2
	II		8			7.7	6.4	
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.2-27.11	30	35	40	45	
45	IV	起重重量 Load (t)	16	13.94	11.18	9.11	7.5	
	III		12		11.38	9.31	7.7	
	II		8			7.9		
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3.7-27.43	30	35	40		
40	IV	起重重量 Load (t)	16	14.1	11.46	9.4		
	III		12		11.66	9.6		
	II		8					
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3.3-25.08	30	35			
35	IV	起重重量 Load (t)	16	14.33	11.6			
	III		12		11.8			
	II		8					
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	2.8-25.39	30				
30	IV	起重重量 Load (t)	16	14.6				
	III		12					
	II		8					

## 配重配置表 Counter Weight

		4800kg	2900kg	 kg
60	8.5m	6	2	34600
55	8.5m	6	2	34600
50	8.5m	6	1	31700
45	8.5m	6	1	31700
40	8.5m	6	0	28800
35	8.5m	6	0	28800
30	8.5m	6	0	28800

## 机构特性 Mechanisms

机构名称 Name	机构型号 Model				功率 Power		
起升 Hoisting 	100LVF40	m/min	t	m/min	680m 变频控制 Inverter Control	75Kw	
		0-45	8	0-22.5			16
		0-90	4	0-45			8
拉臂 Luffing 	75DVF50	min	≤3.0		变频控制 Inverter Control	55Kw	
回转 Slewing 	RCV185	r/min	0-0.7			2 × 185Nm	
	RVF185	r/min	0-0.7		变频控制 Inverter Control	2 × 9Kw	
行走 Traveling 	RT443	m/min	0-24		变频控制 Inverter Control	4 × 4Kw	
电网/Power Supply			380V/50Hz 440V/60Hz (±5%)				
供电容量/Necessary Power			185KVA/205KVA (traveling)				

※ 本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.