



QTDC2420



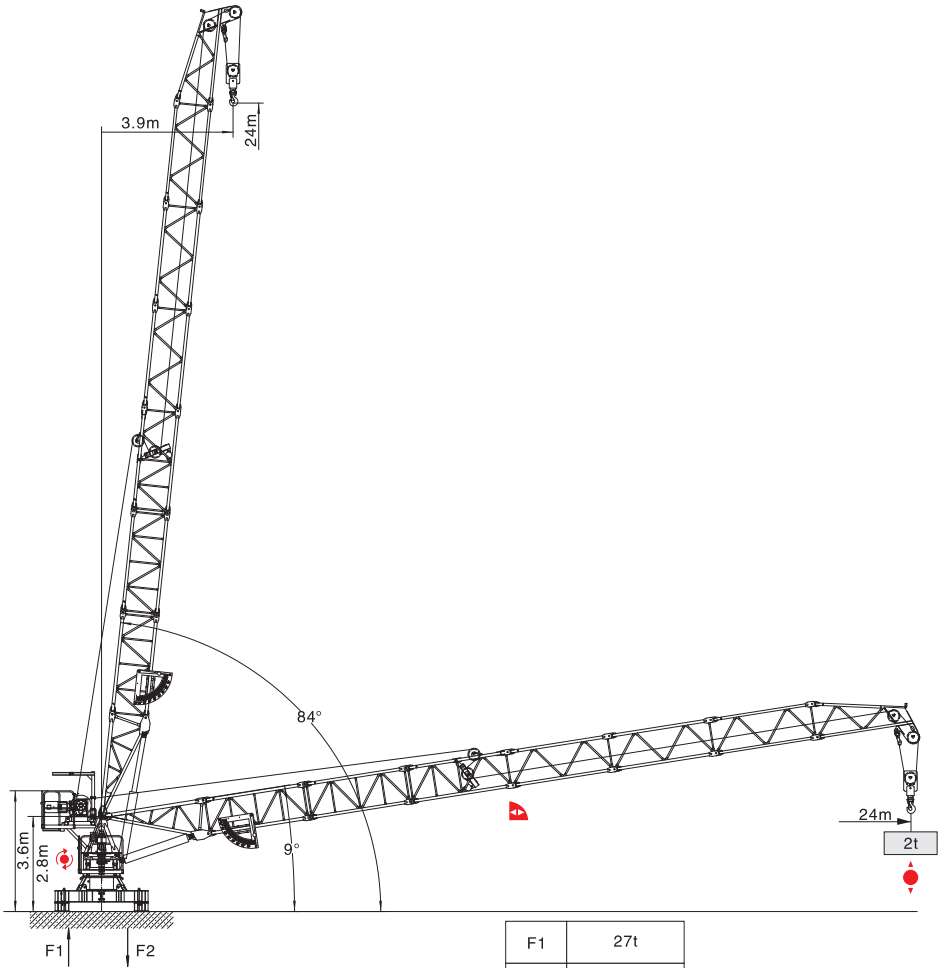






F1	27t
F2	22t
	10t

 自重 Total weight without load and counter weight

载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3.9-12.6	15	18	21	24
24	II	起重量Load (t)	5	3.96	3.04	2.39	1.9
	I		2.5			2.49	2
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3.6-12.9	15	18	21	
21	II	起重量Load (t)	5	4.09	3.16	2.5	
	I		2.5				
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3.3-13.2	15	18		
18	II	起重量Load (t)	5	4.24	3.3		
	I		2.5				
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-13.6	15			
15	II	起重量Load (t)	5	4.4			
	I		2.5				

机构特性 Mechanisms

机构名称 Name	机构型号 Model					功率 Power	
起升 Hoisting 	15LVF25	m/min	t	m/min	t	400m 变频控制 Inverter Control	11Kw
		0-22	2.5	0-22	2.5		
		0-44	1.25	0-11	5		
液压 Hydraulic 	JYH3B	min	≤3.5			11Kw	
回转 Slewing 	RVF95	r/min	0-0.7		变频控制 Inverter Control	4Kw	
电网/Power Supply				380V/50Hz 440V/60Hz (±5%)			
供电容量/Necessary Power				33KVA			

※本技术参数不受法律约束，技术信息请详见相应技术说明书。
Specifications and data is not legally binding.
For any technical information, please refer to the corresponding instructions.