




QTDC3023



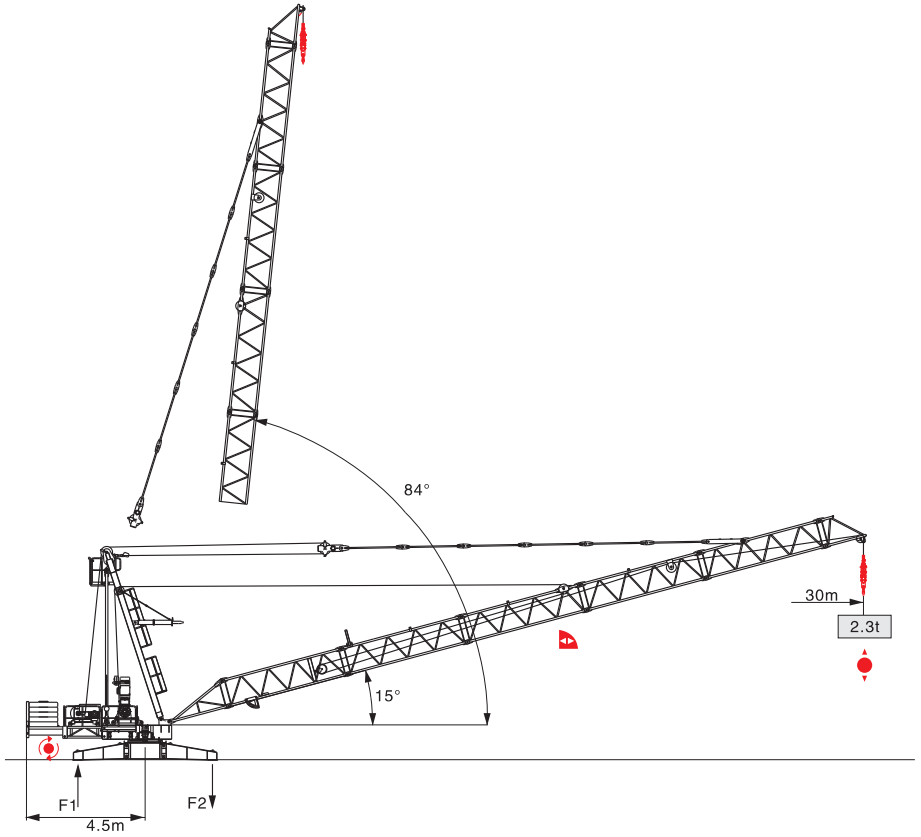

F1	28t
F2	35t
	16t

 自重 Total weight without load and counter weight







载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5-10.65	11	13.2	15	17.5	20	23	25	28	30
			Luffing Degree	84°-69.9°	69.3°	66.1°	61.1°	55.7°	49.9°	42.2°	36.4°	25.6°	15°
30	IV	起重重量Load (t)	10	9.35	7.35	6.26	4.7	4.13	3.3	2.85	2.31	2	
	III		7.5			6.42	4.85	4.28	3.45	3	2.46	2.15	
	II		5					4.43	3.6	3.15	2.61	2.3	
起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5-10.8	11	13.6	15	18	20	23	25		
			Luffing Degree	84°-65.3°	64.9°	59.8°	54.6°	45.9°	39.4°	27.3°	15°		
25	IV	起重重量Load (t)	10	9.53	7.35	6.44	5.02	4.31	3.4	3.03			
	III		7.5			6.59	5.17	4.46	3.55	3.18			
	II		5					4.61	3.7	3.33			
起重臂 Jib (m)	倍率 Fall	起重臂 幅度	Range (m)	4.5-11	14	15	18	18.6	20				
			Luffing Degree	84°-57.9°	49.6°	43.6°	29.6°	26.1°	15°				
20	IV	起重重量Load (t)	10	7.35	6.62	5.2	4.7	4.49					
	III		7.5		6.77	5.35	4.85	4.64					
	II		5					4.79					

配重配置表 Counter Weight

		1500kg	 kg
30m	4.5m	5	7500
25m	4.5m	5	7500
20m	4.5m	5	7500

机构特性 Mechanisms

机构名称 Name	机构型号 Model						功率 Power
起升 Hoisting 	60LVF25	m/min	t	m/min	t	620m 变频控制 Inverter Control	45Kw
		0-45	5	0-22.5	10		
		0-90	2.5	0-45	5		
拉臂 Luffing 	33DVF30	min	≤3.0		变频控制 Inverter Control		24Kw
回转 Slewing 	RCV185	r/min	0-0.7				185Nm
	RVF185	r/min	0-0.7		变频控制 Inverter Control		9Kw
电网/Power Supply				380V/50Hz 440V/60Hz (±5%)			
供电容量/Necessary Power				98KVA			

※本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.