



QTP7022

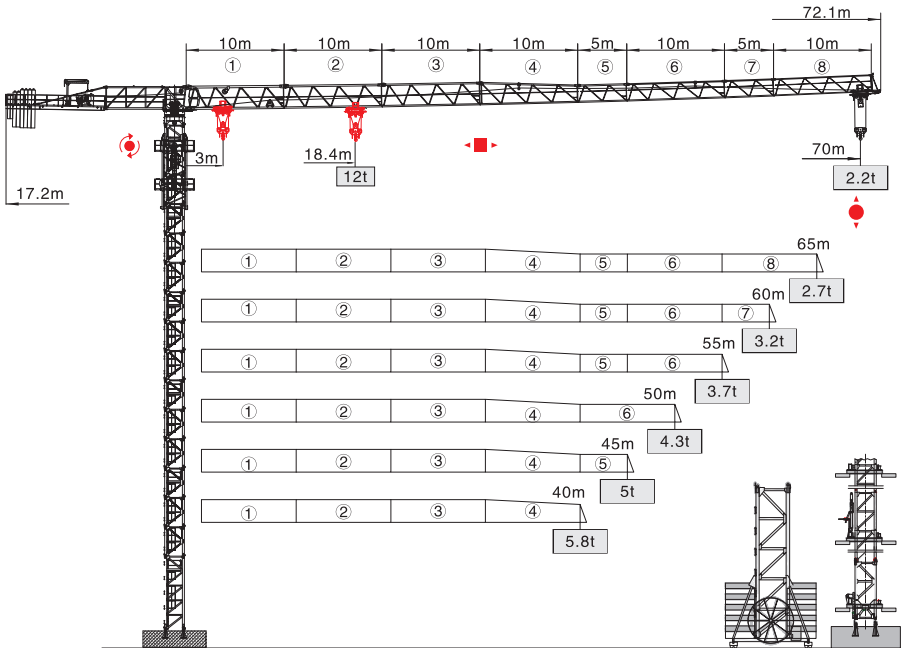

塔身截面 Mast 2m x 2m

固定式 Stationary


H₁/H₂

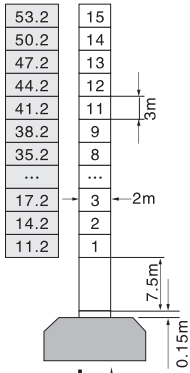

F2	● 125t	■ 168t
F3	● 72t	■ 121t
	⚖️ 70t	

行走式 Traveling


H₁/H₂

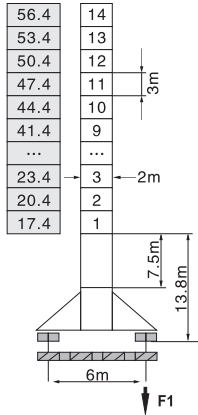

F1	● 87t	■ 99t
	⚖️ 78t	

内爬式 Inner climbing


H₁/H₂

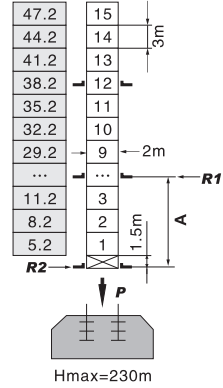

A	12m	18m
R1	32.7t	23.8t
R2	26.7t	17.8t
P	100t	100t
	⚖️ 74t	

- 工作状态 In service
- 非工作状态 Out of service
- F=固定反力或轮压 Reactions
- ⚖️ 自重 Total weight without load and counter weight

附着 Anchorage

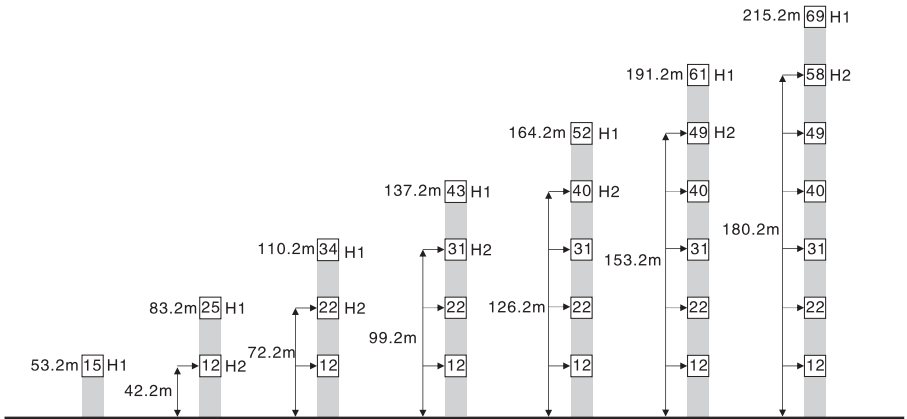




H₁—塔机吊钩距地面的高度 Height under hook
 H₂—塔机附着位置距地面的高度 Height of anchorage frame to the ground
 ① > 215.2m 请向我司咨询 Consult us








载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-18.4	20	25	30	33.3	35	40	45	50	55	60	65	70	
			70	IV	起重重量 Load (t)	12	10.91	8.36	6.69	5.88	5.52	4.65	3.97	3.44	3.01	2.64
	II		6						5.64	4.77	4.09	3.56	3.13	2.76	2.46	2.2
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-19.6	20	25	30	35	35.4	40	45	50	55	60	65		
			65	IV	起重重量 Load (t)	12	11.72	9	7.22	5.97	5.89	5.04	4.32	3.75	3.29	2.9
	II		6						5.16	4.44	3.87	3.41	3.02	2.7		
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-20.3	25	30	35	36.9	40	45	50	55	60				
			60	IV	起重重量 Load (t)	12	9.43	7.58	6.28	5.88	5.31	4.56	3.97	3.48	3.08	
	II		6						5.43	4.68	4.09	3.6	3.2			
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-20.7	25	30	35	37.6	40	45	50	55					
			55	IV	起重重量 Load (t)	12	9.66	7.76	6.43	5.88	5.44	4.68	4.07	3.58		
	II		6						5.56	4.8	4.19	3.7				
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-21.1	25	30	35	40	45	50							
			50	IV	起重重量 Load (t)	12	9.87	7.94	6.59	5.58	4.8	4.18				
	II		6						5.7	4.92	4.3					
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-21.4	25	30	35	40	45								
			45	IV	起重重量 Load (t)	12	10.02	8.07	6.69	5.68	4.88					
	II		6						5.8	5						
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3-21.4	25	30	35	40									
			40	IV	起重重量 Load (t)	12	10.02	8.07	6.69	5.68						
	II		6						5.8							

配重配置表 Counter Weight

		3600kg	3300kg	1500kg	 kg
70m	17.2m	4	2	2	24000
65m	17.2m	4	2	1	22500
60m	17.2m	4	2	1	22500
55m	17.2m	4	2	0	21000
50m	17.2m	3	2	1	18900
45m	17.2m	4	1	0	17700
40m	17.2m	4	0	1	15900

机构特性 Mechanisms

机构名称 Name	机构型号 Model				功率 Power		
起升 Hoisting 	75LVF30	m/min	t	m/min	t	650m 变频控制 Inverter Control	55Kw
		0-45	6	0-22.5	12		
		0-90	3	0-45	6		
变幅 Trolleying 	55BPX70	m/min	0-60		变频控制 Inverter Control	5.5Kw	
回转 Slewing 	RCV145	r/min	0-0.7			2 × 145Nm	
	RVF145	r/min	0-0.7		变频控制 Inverter Control	2 × 7.5Kw	
行走 Traveling 	RT443	m/min	0-24		变频控制 Inverter Control	4 × 4Kw	
电网/Power Supply			380V/50Hz 440V/60Hz (±5%)				
供电容量/Necessary Power			95KVA/115KVA (traveling)				

※ 本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.