



# QTP7530

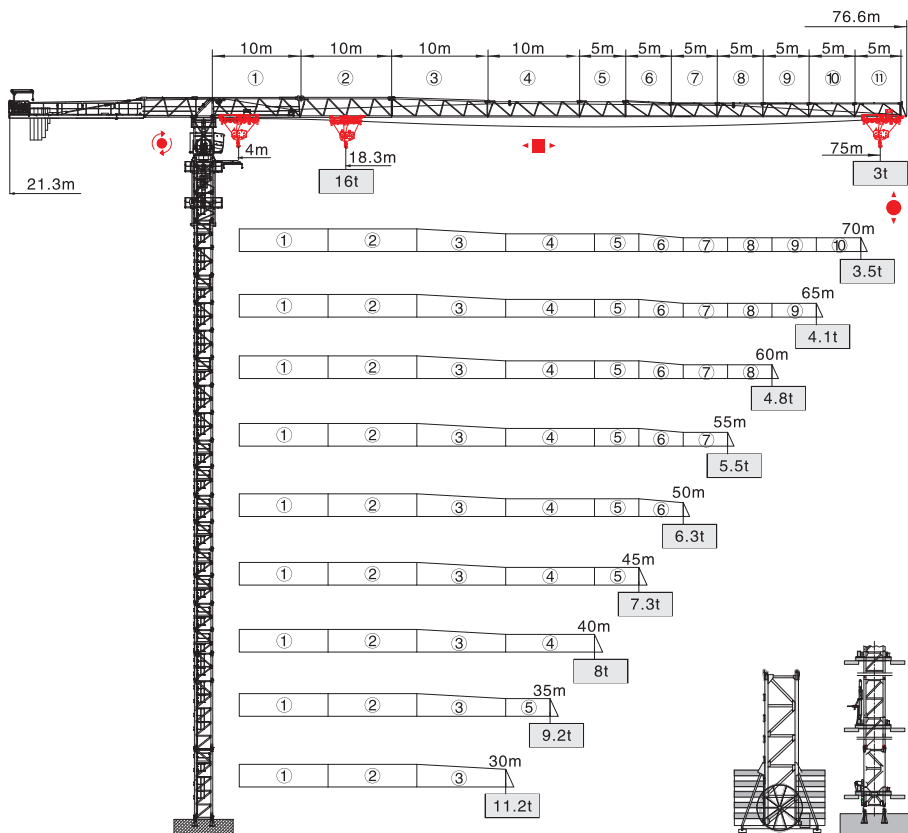

## 塔身截面 Mast 2m × 2m

固定式 Stationary


H<sub>1</sub>/H<sub>2</sub> L68B1

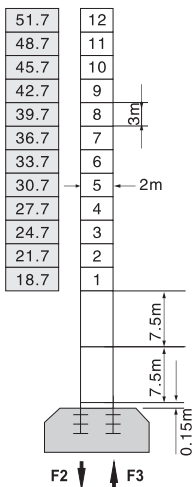

F2	● 151t	■ 202t
F3	● 91t	■ 150t
	81t	

行走式 Traveling


H<sub>1</sub>/H<sub>2</sub> L68B1

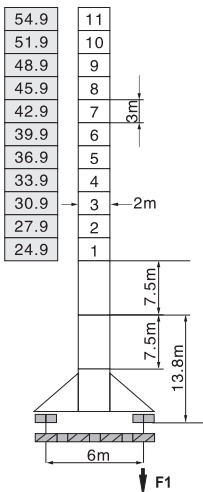

F1	● 97t	■ 120t
	89t	

内爬式 Inner climbing


H<sub>1</sub>/H<sub>2</sub> L68B1

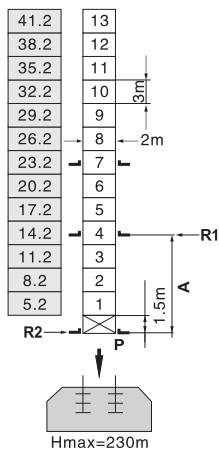

A	12m	18m
R1	36.3t	26.7t
R2	28.8t	19.2t
P	115t	115t
	82t	

- 工作状态 In service
- 非工作状态 Out of service
- F=固定反力或轮压 Reactions
- ⊕ 自重 Total weight without load and counter weight

## 附着 Anchorage

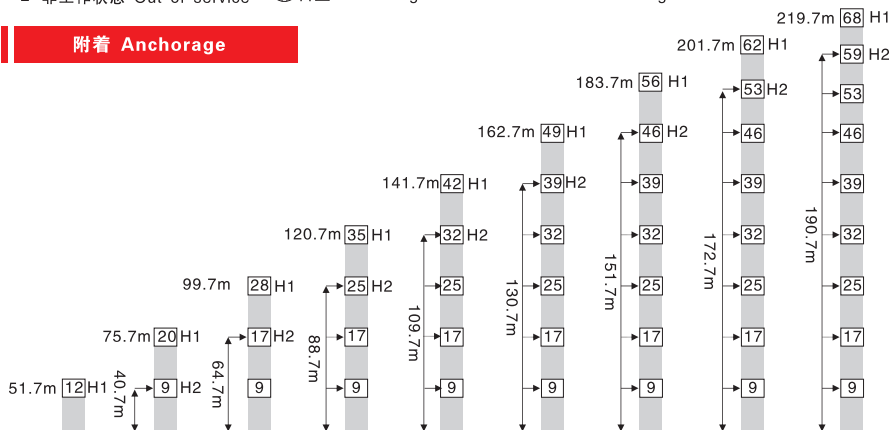

H1—塔机吊钩距地面的高度 Height under hook




H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground

① > 219.7m 请向我司咨询 Consult us








## 载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4-18.3	20	25	30	35	40	45	50	55	60	65	70	75
75	IV	起重重量 Load (t)	16	14.38	10.93	8.69	7.11	5.94	5.04	4.33	3.74	3.26	2.85	2.5	2.2
	II		8						7.91	6.74	5.84	5.13	4.54	4.06	3.65
70	IV	起重重量 Load (t)	16	15.11	11.51	9.17	7.2	6.3	5.35	4.61	4	3.49	3.06	2.7	
	II		8						7.1	6.15	5.41	4.8	4.29	3.85	3.5
65	IV	起重重量 Load (t)	16	15.91	12.14	9.69	7.2	6.69	5.7	4.91	4.28	3.75	3.3		
	II		8						7.49	6.5	5.71	5.08	4.55	4.1	
60	IV	起重重量 Load (t)	16	12.77	10.21	8.41	7.07	6.04	5.22	4.55	4				
	II		8						7.87	6.84	6.02	5.35	4.8		
55	IV	起重重量 Load (t)	16	13.11	10.48	8.64	7.2	6.22	5.38	4.7					
	II		8						7.02	6.18	5.5				
50	IV	起重重量 Load (t)	16	13.35	10.68	8.81	7.42	6.35	5.5						
	II		8						7.15	6.3					
45	IV	起重重量 Load (t)	16	13.58	10.89	9	7.59	6.5							
	II		8						7.3						
40	IV	起重重量 Load (t)	16	13.76	11.04	9.13	7.7								
	II		8												
35	IV	起重重量 Load (t)	16	13.86	11.13	9.2									
	II		8												
30	IV	起重重量 Load (t)	16	13.95	11.2										
	II		8												

## 配重配置表 Counter Weight

		5000kg	4300kg	2000kg	1300kg	 kg
75m	21.3m	3	1	1	1	22600
70m	21.3m	3	1	1	0	21300
65m	21.3m	3	1	0	1	20600
60m	21.3m	3	1	0	0	19300
55m	21.3m	3	1	0	0	19300
50m	18.3m	3	1	1	1	22600
45m	18.3m	3	1	1	0	21300
40m	18.3m	3	1	0	0	19300
35m	18.3m	3	0	0	0	15000
30m	18.3m	2	1	0	0	14300

## 机构特性 Mechanisms

机构名称 Name	机构型号 Model						功率 Power
起升 Hoisting 	100LVF40	m/min	t	m/min	t	680m 变频控制 Inverter Control	75Kw
		0-45	8	0-22.5	16		
		0-90	4	0-45	8		
变幅 Trolleying 	90BPX75	m/min	0-65		变频控制 Inverter Control		9Kw
回转 Slewing 	RCV185	r/min	0-0.7				2 × 185Nm
	RVF185	r/min	0-0.7		变频控制 Inverter Control		2 × 9Kw
行走 Traveling 	RT443	m/min	0-24		变频控制 Inverter Control		4 × 4Kw
电网/Power Supply				380V/50Hz 440V/60Hz (± 5%)			
供电容量/Necessary Power				128KVA/148KVA (traveling)			

※ 本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.