



QTP8072

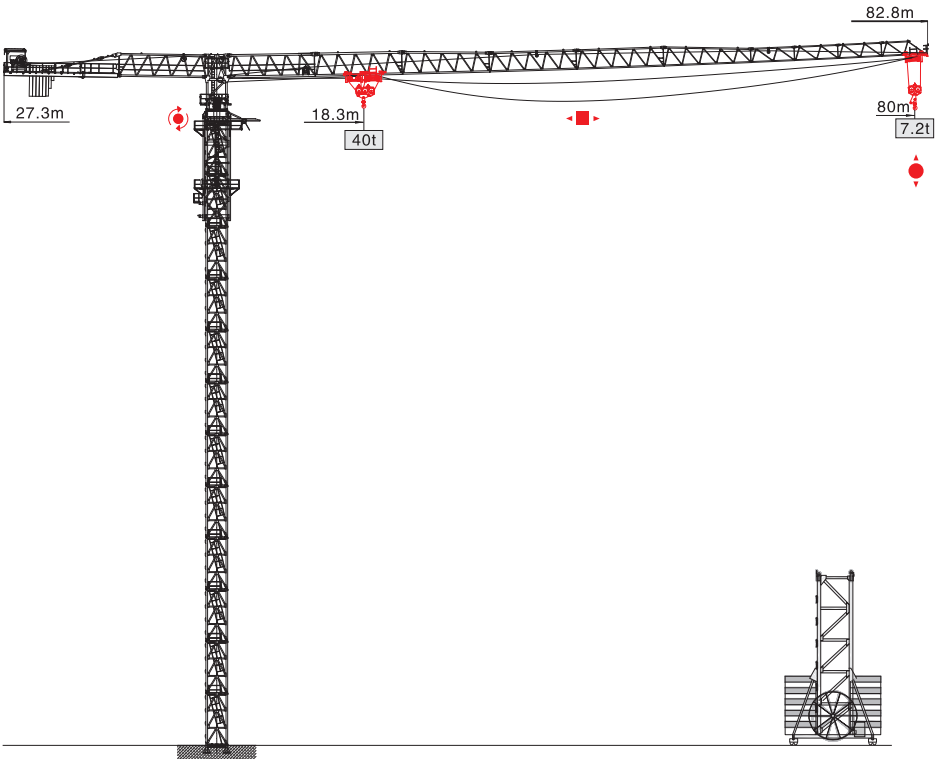

塔身截面 Mast 3m x 3m

固定式 Stationary


H1/H2

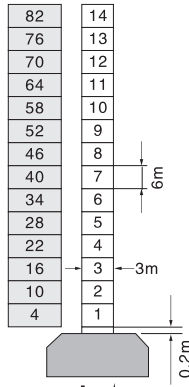

F2	●256t	■275t
F3	●183t	■202t
⚖	186t	

- 工作状态 In service
- 非工作状态 Out of service
- F=固定反力或轮压 Reactions
- ⚖ 自重 Total weight without load and counter weight

附着 Anchorage

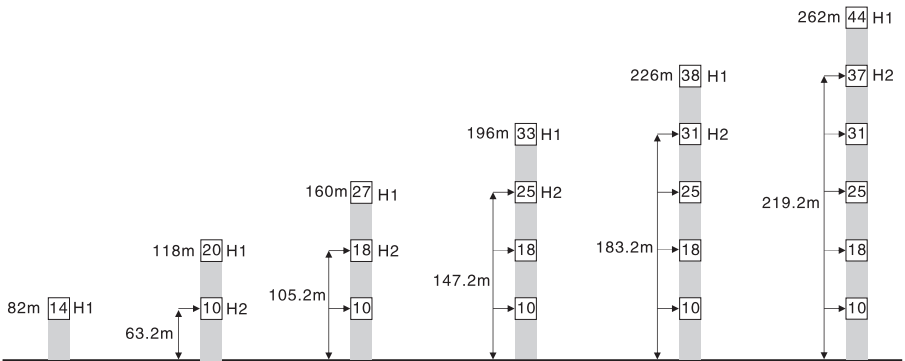

H1—塔机吊钩距地面的高度 Height under hook




H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground

① > 262m 请向我司咨询 Consult us







载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-18.3	20	25	30	35	40	45	50	55	60	65	70	75	80
80	IV	起重量 Load (t)	40	35.86	27.33	21.83	17.99	15.15	12.97	11.24	9.84	8.68	7.7	6.87	6.15	5.52
	II	起重量 Load (t)	20				19.66	16.83	14.65	12.92	11.52	10.36	9.38	8.55	7.83	7.2
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-19.1	20	25	30	35	40	45	50	55	60	65	70	75	
75	IV	起重量 Load (t)	40	37.76	28.82	23.05	18.5	16.05	13.77	11.96	10.49	9.27	8.25	7.38	6.62	
	II	起重量 Load (t)	20				17.73	15.45	13.64	12.17	10.95	9.93	9.05	8.3		
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-19.9	20	25	30	35	40	45	50	55	60	65	70		
70	IV	起重量 Load (t)	40	39.8	30.42	24.37	20.15	17.03	14.63	12.73	11.19	9.91	8.84	7.92		
	II	起重量 Load (t)	20				18.71	16.31	14.41	12.87	11.59	10.52	9.6			
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-20.3	25	30	35	40	45	50	55	60	65				
65	IV	起重量 Load (t)	40	31.19	25.01	22.67	16.2	14.02	12.28	10.84	10.22	9.12				
	II	起重量 Load (t)	20				19.18	16.72	14.78	13.21	11.9	10.8				
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-21	25	30	35	40	45	50	55	60					
60	IV	起重量 Load (t)	40	32.45	26.04	21.56	18.12	15.72	13.71	12.07	10.72					
	II	起重量 Load (t)	20				19.95	17.4	15.39	13.75	12.4					
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-22	25	30	35	40	45	50	55						
55	IV	起重量 Load (t)	40	34.4	27.64	22.92	18.7	16.76	14.64	12.92						
	II	起重量 Load (t)	20				18.44	16.32	14.6							
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-21.7	25	30	35	40	45	50							
50	IV	起重量 Load (t)	40	33.93	27.26	22.6	19.16	16.52	14.42							
	II	起重量 Load (t)	20				18.19	16.1								
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-22	25	30	35	40	45								
45	IV	起重量 Load (t)	40	34.5	27.73	23	19.5	16.82								
	II	起重量 Load (t)	20				18.5									
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-22.1	25	30	35	40									
40	IV	起重量 Load (t)	40	34.69	27.89	23.13	19.62									
	II	起重量 Load (t)	20													
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-22.3	25	30	35										
35	IV	起重量 Load (t)	40	34.82	27.99	23.22										
	II	起重量 Load (t)	20													
起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	4.5-21.8	25	30											
30	IV	起重量 Load (t)	40	34.13	27.42											
	II	起重量 Load (t)	20													

配重配置表 Counter Weight

		5500kg	4000kg	2500kg	 kg
80m	27.3m	5	1	0	31500
75m	27.3m	5	0	1	30000
70m	27.3m	5	0	1	30000
65m	27.3m	4	1	1	28500
60m	27.3m	4	1	0	26000
55m	27.3m	4	1	0	26000
50m	27.3m	3	1	1	23000
45m	21.3m	6	0	0	33000
40m	21.3m	5	1	0	31500
35m	21.3m	4	1	0	26000
30m	21.3m	3	1	1	23000

机构特性 Mechanisms

机构名称 Name	机构型号 Model						功率 Power
		m/min	t	m/min	t		
起升 Hoisting 	110LVF100	m/min	t	m/min	t	1100m 变频控制 Inverter Control	110Kw
		0-34	20	0-17	40		
		0-68	10	0-34	20		
变幅 Trolleying 	185BPX70	m/min	0-70		变频控制 Inverter Control	18.5Kw	
回转 Slewing 	RCV185	r/min	0-0.7			4 × 185Nm	
	RVF185	r/min	0-0.7		变频控制 Inverter Control	4 × 9Kw	
电网/Power Supply				380V/50Hz 440V/60Hz (± 5%)			
供电容量/Necessary Power				210KVA			

※本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.